


VME

miriac® VME2020

Based on the NXP® QorIQ® Power Architecture

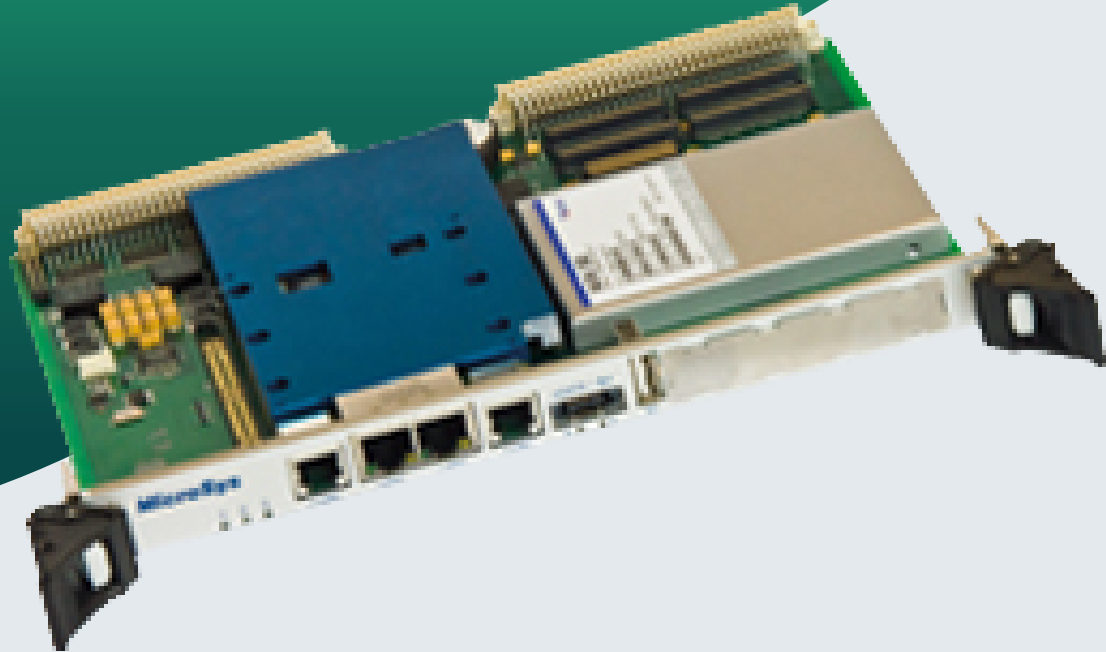

Highlights



- 6U VMEbus CPU Board, 2eSST VME-Bus interface
- Conforms to VMEbus specification ANSI/IEEE STD1014-1987- and ANSI/VITA 1-1994
- QorIQ® NXP® P2020 dual core CPU, up to 1.33 GHz core speed
- Up to 2 GB DDR2-soldered ECC RAM and up to 512 MB NAND Flash memory





Product Description

The product family addresses applications from low performance and power requirements up to high performance multi core usage profiles. The VME2020 board is operated by a QorIQ® P2020 dual core processor. The boards are specified for rugged and harsh environmental conditions and versions for the extended temperature range of -40°C to +85°C are available on request.



Features


CPU	
Processor:	NXP®QorIQ®P2020 dual core CPU, up to 1.33 GHz core speed
DRAM:	up to 2 GB DDR2-soldered ECC RAM
Memory	
Flash:	up to 512 MB NAND Flash memory
Flash Card:	1x microSD card connector
Graphic	
HDMI Interface:	1x HDMI (processor option) in Front Panel
High Speed IO	
USB 2.0:	2x USB on Front Panel
SATA:	1x eSATA on Front Panel
SATA:	1x SATA interface for standard 2,5" on board mountable mass storage devices
Mechanical	
Formfactor:	6U VMEbus CPU Board, 2eSST VME-Bus interface
Formfactor:	6U VMEbus CPU Board, 2eSST VME-Bus interface
Software / Additional	
Software Support:	Linux, Microware® OS-9, VxWorks, others on request
Additional:	CPU temperature monitoring

General Note:

Our standard product versions offer what we consider to be the optimum configuration in terms of performance, price, usage and TDP. The product features lists specify the maximum range of functions per interface. However, not all interfaces or functions are always available in parallel. Flexible SERDES multiplexing is one of the reasons for this. In addition, we provide multiple memory expansion options and are also happy to accommodate specific customer wishes. So do not hesitate to [contact us](#) directly to discuss your desired configuration.



Block Diagrams

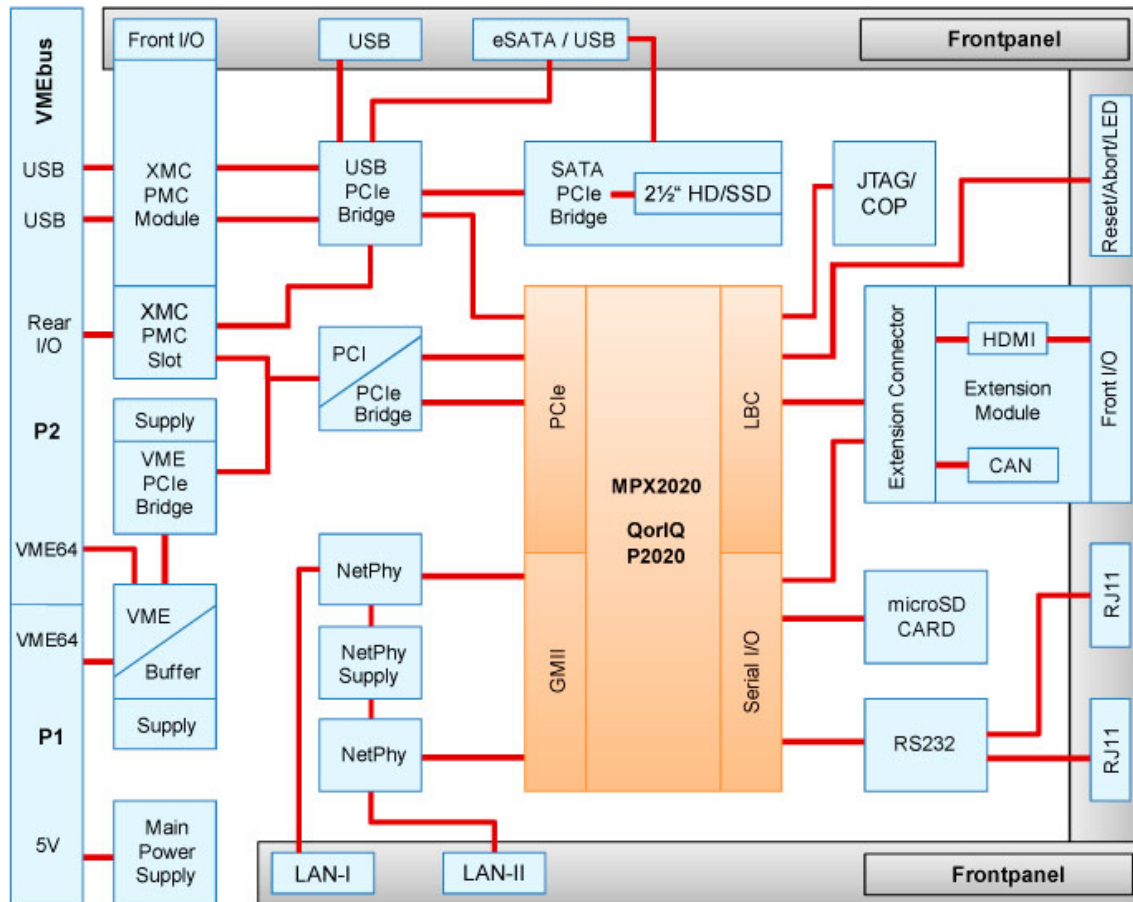

miriac® VME2020



Order Info

Name	Code	Description	Status
miriac® VME2020	839201	2 QorIQ®, 1.2 GHz, 2 GB DDR2 w ECC, 4 MB NOR Flash, 256 MB NAND Flash, 0° to 70° C, w/o SEC	EOL
miriac® VME2020	839202	2 QorIQ®, 1.2 GHz, 1 GB DDR2 w ECC, 4 MB NOR Flash, 256 MB NAND Flash, 0° to 70° C, w/o SEC	EOL



Mühlweg 1
82054 Sauerlach
Germany

Sales: +49 8104 801-130
E-Mail: info@microsys.de
www.microsys.de

