


SoMs Arm® Architecture

miriac® MPX-S32G399A

MicroSys' 2nd Gen of System-on-Modules for vehicle networks based on the NXP® S32G399A processor

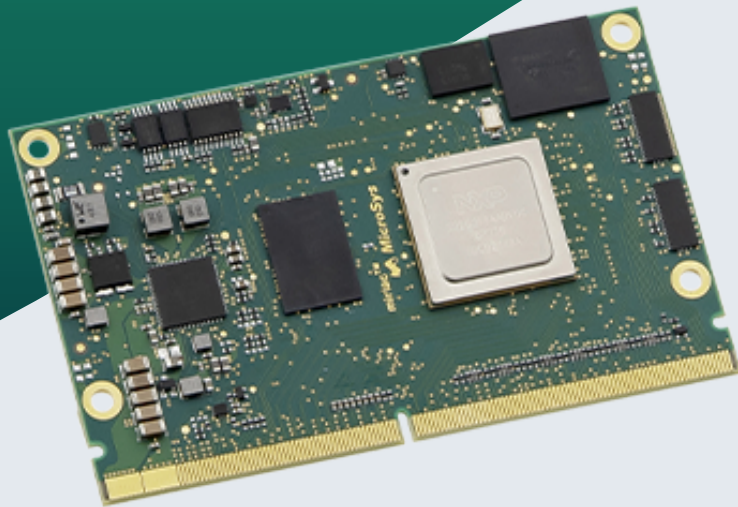

Highlights



- 8 Arm® Cortex®-A53 cores and 4 Arm® Cortex®-M7 cores including lockstep support
- Comprehensive connectivity including 18x CAN FD + dedicated protocol engine, furthermore FlexRay, LIN, SPI, Ethernet with TSN, PCI Express®, USB and I²C
- Hardware Security Engine for secure boot and accelerated security services





Product Description

Since the MPX-S32G399A System-on-Modules offer multiple native CAN interfaces, as well as FlexRay, LIN and Ethernet support, target markets include real-time connected vehicles, mobile machinery and automotive test and measurement equipment. Further application areas include data loggers, edge gateways and fail-safe programmable logic controllers (PLCs).



Features

| CPU | |
|--------------------------------|---|
| Architecture: | Arm® Cortex®-A53 |
| Processor: | NXP® S32G399A CPU: 8 Arm® Cortex®-A53 64-bit cores, 4 Arm® Cortex®-M7 dual-core lockstep pairs |
| DRAM: | 4 GB 32-bit soldered LPDDR4 RAM at 3200 MT/s |
| Memory | |
| Flash: | 64 MB QSPI Flash |
| Flash Card: | Interface for external SD-card multiplexed with eMMC |
| Boot Flash: | Boot select: XSPI, eMMC or external SD card |
| eMMC: | Up to 32 GB |
| Ethernet | |
| RGMII: | 3x |
| SGMII: | 3x 2.5 Gbps |
| High Speed IO | |
| SerDes lanes: | 4x |
| ULPI-USB: | 1x |
| PCIe: | Yes |
| Security / Safety | |
| Security: | Hardware Security Engine (HSE) for secure boot and accelerated security services |
| Safety: | <ul style="list-style-type: none">- Advanced hardware and software for safety applications- Optional: Certification Kit- Optional: AEC-Q100 Grade 3 (or I): -40°C to 85°C |
| Operating Condition | |
| Power Supply Voltage: | Single DC power input (+9 V to +36 V) |
| Optional Power Supply Voltage: | Single DC power input (+6 V to +36 V) |
| Power Management: | Yes |
| RTC: | RV-3028-C7 |
| Temperature: | 0 °C to 70 °C |
| Optional Extended Temperature: | -40 °C to 85 °C |
| Mechanical | |


| | |
|------------------------------|--|
| Dimensions: | 82 mm x 50 mm |
| Connector Type: | MXM3.0 |
| Software / Additional | |
| Software Support: | <ul style="list-style-type: none"> - Linux - VxWorks (on request) - Others (on request) |
| Additional: | <ul style="list-style-type: none"> - All I/O pins available on 314-pin edge connector - Low Latency Communication Engine (LLCE) for vehicle networks acceleration - Packet Forwarding Engine (PFE) for Ethernet networks acceleration - Dev Kit available for immediate start, includes power supply, cables. Linux on SD card |

General Note:


Our standard product versions offer what we consider to be the optimum configuration in terms of performance, price, usage and TDP. The product features lists specify the maximum range of functions per interface. However, not all interfaces or functions are always available in parallel. Flexible SERDES multiplexing is one of the reasons for this. In addition, we provide multiple memory expansion options and are also happy to accommodate specific customer wishes. So do not hesitate to [contact us](#) directly to discuss your desired configuration.



Block Diagrams

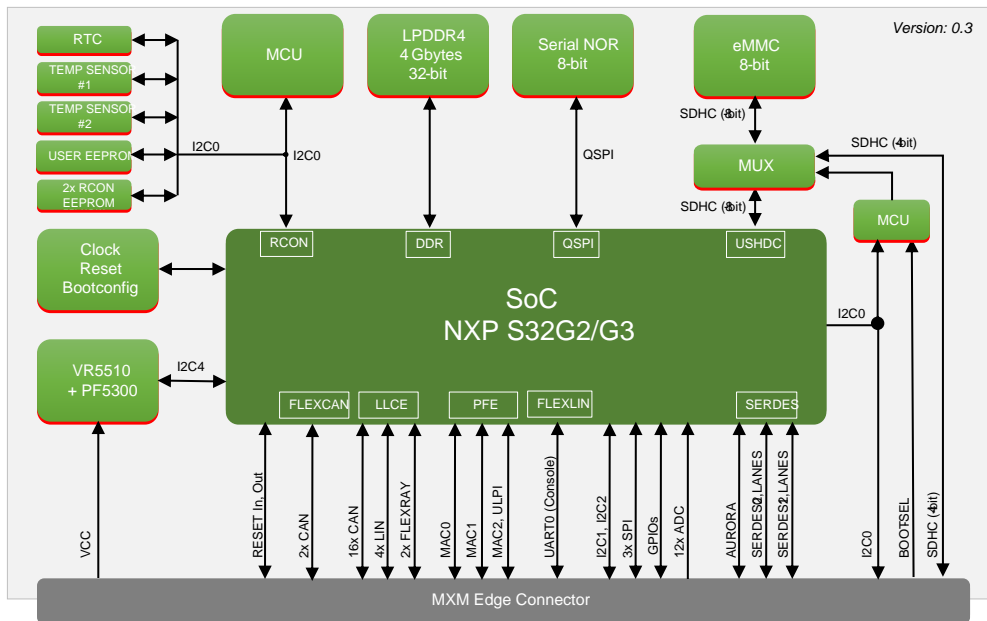

miriac® MPX-S32G3

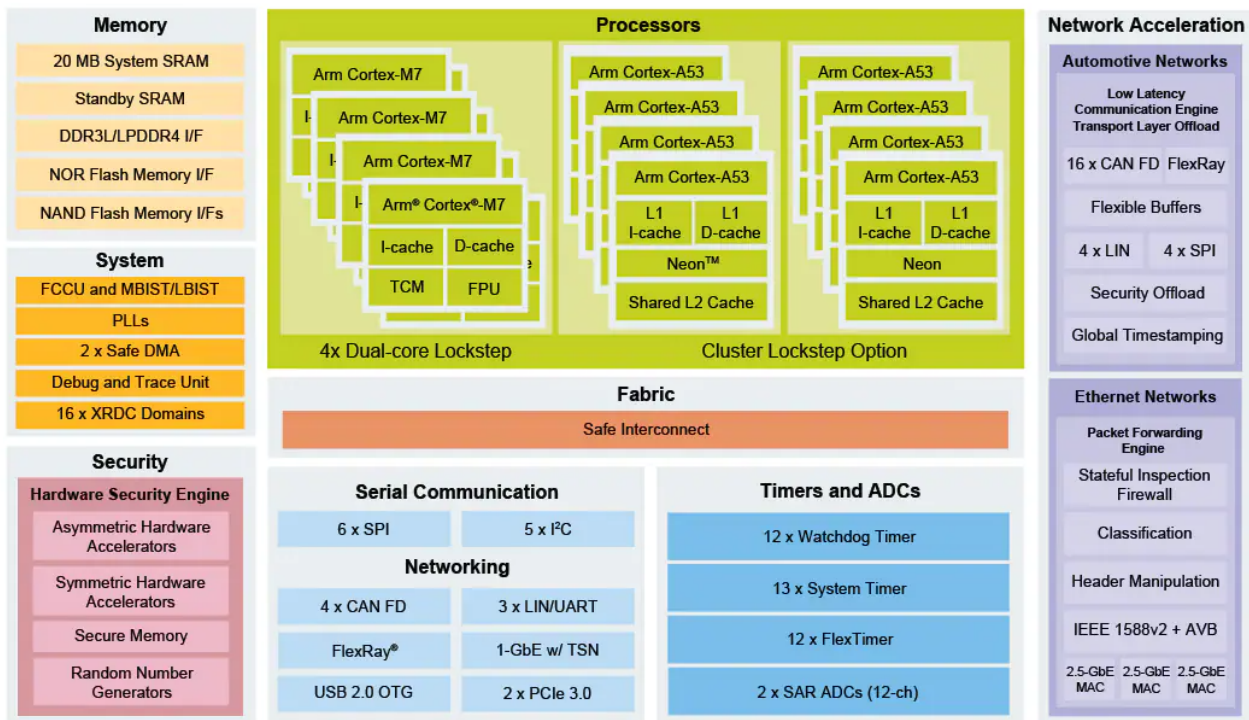

NXP® S32G399A








Order Info

| Name | Code | Description | Status |
|--|------|---|-------------|
| miriac® MPX-S32G399A | TBD | 8 Arm® Cortex®-A53, 1.3 GHz, 4 GB LPDDR4 w ECC, 64 MB NOR Flash, 16 GB eMMC, 0 °C to 70 °C, w/o SEC | coming 2024 |
| Development Kit basic for miriac® MPX-S32G399A | TBD | 8 Arm® Cortex®-A53, 1.3 GHz, 4 GB LPDDR4 w ECC, 64 MB NOR Flash, 16 GB eMMC, 0 °C to 70 °C, w/o SEC | coming 2024 |



Related Products

| Name | Description | Image |
|----------------------|--|---|
| miriac® SBC-S32G274A | NXP® S32G274A processor based SBCs for vehicle network computing |  |
| miriac® AIP-S32G274A | High-performance embedded AI platforms |  |
| miriac® MPX-S32G274A | Vehicle gateway platform with massive native CAN support |  |
| miriac® AIP-S32G399A | High-performance embedded AI platforms |  |
| miriac® SBC-S32G399A | NXP® S32G399A processor based SBCs for vehicle network computing |  |

 **MicroSys**
Creating Embedded Systems

Mühlweg 1
82054 Sauerlach
Germany

Sales: +49 8104 801-130
E-Mail: info@microsys.de
www.microsys.de


Gold
Partner