


Arm® Architecture

miriac® MPX-S32G274A

Vehicle gateway platform with
massive native CAN support.

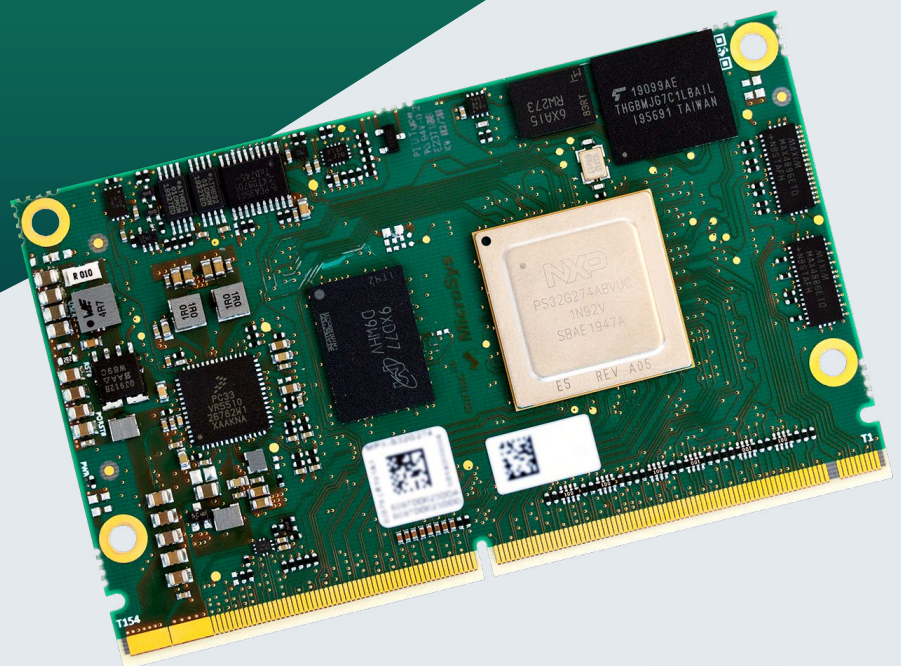

System-On-Modules at a glance

- CPUs can be clustered and operated in lockstep mode for ASIL-D applications
- Hardware Security Engine for secure boot and accelerated security services
- Comprehensive connectivity including 18x CAN FD + dedicated protocol engine, furthermore FlexRay, Lin, SPI, Ethernet with TSN, PCI express®, USB and I²C



Product Description

Providing more than 10 times the performance and networking of NXP's previous family of vehicle gateway devices, the versatile S32G processor is enabling the next generation of vehicle gateways and architectures. The MPX-S32G274A System on Module, which is based on the S32G274A CPU, is an excellent basis to design related solutions for industrial and vehicle applications.

Specifications

CPU

Architecture	Arm® Cortex®-A53
Processor	NXP® S32G274A CPU: 4 Arm® Cortex®-A53 64-bit cores at 1Ghz, 3 Arm® Cortex®-M7 dual-cores at 400Mhz
DRAM	4 GB 32-bit soldered LPDDR4 RAM at 3200MT/s

Memory

Flash	64 MB QSPI Flash
Flash Card	Interface for external SD card multiplexed with eMMC
Boot Flash	Boot select: XSPI, eMMC or external SD card
eMMC	up to 32 GB

Ethernet

RGMII	3x
SGMII	1x 2.5 Gbs

High Speed IO

SerDes lanes	4x
ULPI-USB	1x
PCIe	Yes

IO

Flex SPI	4x
UART	2x
CAN FD	18x
FlexRay	2x
LIN	4x
I ² C	4x
analog inputs (ADCs)	12x
GPIOs	Yes
JTAG Debug Interface	Yes
Aurora Interface	Yes

Security / Safety

Security	Hardware Security Engine (HSE) for secure boot and accelerated security services
Safety	Advanced functional safety hardware and software for ASIL D systems AEC-Q100 Grade 2 device: -40 °C to 105 °C

Operating Condition

Power Supply Voltage	Single DC power input (+9 V to +36 V)
Typical Power Consumption	3,5 W
RTC	RV-3028-C7
Temperature	0 °C to 70 °C
opt. Temperature	-40 °C to 85 °C



Specifications

Mechanical

Dimensions	82 mm x 50 mm
Connector Type	MXM3.0



Software / Additional

Software Support	<ul style="list-style-type: none">■ Linux■ VxWorks (on request)■ Others (on request)
Additional	<ul style="list-style-type: none">■ All I/O pins available on 314-pin edge connector■ Low Latency Communication Engine (LLCE) for vehicle networks acceleration■ Packet Forwarding Engine (PFE) for Ethernet networks acceleration■ Dev Kit available for immediate start, includes power supply, cables. Linux on SD card

General note:

Our standard product versions offer what we consider to be the optimum configuration in terms of performance, price, usage and TDP. The product features lists specify the maximum range of functions per interface. However, not all interfaces or functions are always available in parallel. Flexible SERDES multiplexing is one of the reasons for this. In addition, we provide multiple memory expansion options and are also happy to accommodate specific customer wishes. So do not hesitate to contact us directly to discuss your desired configuration.

Block diagram

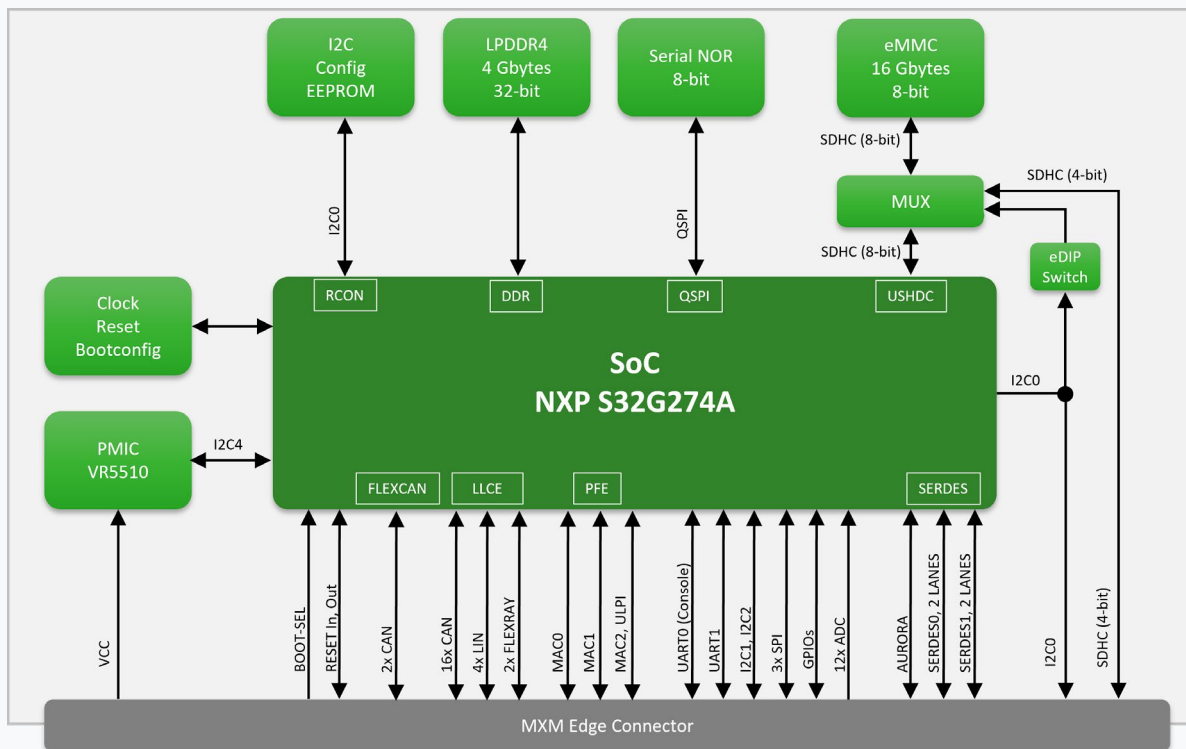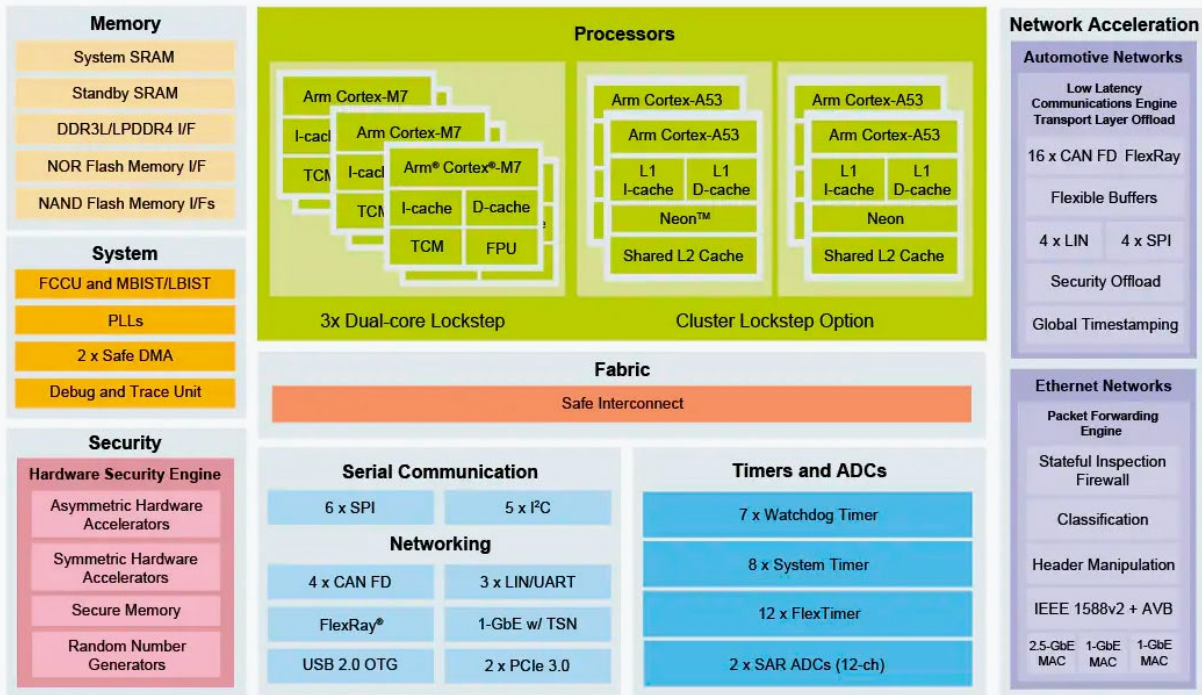



Order Information

Name	Code	Description	Status
Development Kit basic for miriac® MPX-S32G274	859010	4 Arm® Cortex®-A53, 1.0 GHz, 4 GB DDR4 w ECC, 64 MB NOR Flash, 16 GB eMMC, 0 °C to 70 °C, w/o SEC	active
Development Kit basic for miriac® MPX-S32G274	859014	4 Arm® Cortex®-A53, 1.0 GHz, 4 GB DDR4L w ECC, 64 MB NOR Flash, 32 GB eMMC, -40 °C to 85 °C, w SEC	active
miriac® MPX-S32G274	858102	4 Arm® Cortex®-A53, 1.0 GHz, 4 GB DDR4L w ECC, 64 MB NOR Flash, 16 GB eMMC, 0 °C to 70 °C, w/o SEC	active
miriac® MPX-S32G274	858103	4 Arm® Cortex®-A53, 1.0 GHz, 4 GB DDR4L w ECC, 64 MB NOR Flash, 32 GB eMMC, -40 °C to 85 °C, w/o SEC	active



Related Products

Name	Code	Description	Status
miriac® SBC-S32G274A	859010	Arm® Cortex®-A53	active
miriac® AIP-S32G274A	859013	High-performance embedded AI platforms	active
miriac® MPX-S32G399A	-	Vehicle gateway platform with massive native CAN support	coming 2022

 **MicroSys**
Creating Embedded Systems

Mühlweg 1
82054 Sauerlach
Germany

Sales: +49 8104 801-130
E-Mail: info@microsys.de
www.microsys.de

